1L-5L Automatic Edible Oil Filling Machine 6 Nozzles 1200BPH

Basic Information

• Place of Origin: Changzhou, China

Brand Name: TOM

• Certification: ISO9001:2000, ISO14001, OHSAS18001,

CE, CO

Model Number: GZH-6LA1

Minimum Order Quantity:

• Price: Negotiable

Packaging Details: Non-fumigation Wooden Case inserted Iron

Shelf, Suitable for Long Time Sea Delivery

• Delivery Time: 30 WORKING DAYS

• Payment Terms: T/T

Supply Ability: 25SETS/MONTHLY



Product Specification

Material: SS304 Or SS316L

• Pneumatic Element: Airtac

• Electronic Element: Siemens, Schneider Or Panasonic

Filling Tank: Including
Liquid Level Sensor: Including
Cleaning Function: Including

• Highlight: 5L Edible Oil Filling Machine,

Automatic Edible Oil Filling Machine, 1200BPH edible oil bottle packing machine



1L-5L 6 Nozzles Automatic PLC Controlled Edible Oil Filling Machine 1200BPH



Major characteristics:

This is linear piston filling machine, especially designed for high viscous, low viscous and non-viscous products. Controlled by PLC and touch screen control panel. Accurate measuring, advanced structure, stable operation, and low noise, widely adjusting range and fast filling speed.

- 1. Adopts advanced mechanical and electrical integration technology. Any filling specification can easily be done by changing parameters in touch screen. Not only the filling volume of all filling heads can be changed substantially, but also each filling head volume can be changed finely.
- 2. With PLC technologies, which make operation of machine steadier, convenient, the human machine interface is friendlier. Photoelectric sensor, approaching switch and other elements are using international famous brand. No bottle no filling, the machine can stop automatically and alarm when bottles get blocked.
- 3. Various sealing rings used can meet different characteristics of products requirements.
- 4. Designing and production meet GMP. Easily dismantle, clean and maintain. The parts which contact filling products are made of high quality stainless steel. The machine is safe, environmental, sanitary, adapting to various kinds of working places.
- 5. The material which contacts liquid will be made of SS316L.
- 6. This machine has the function of "automatic cleaning system" in PLC, can be operated by touch screen.

Technical parameters

No.	Items	Performance
01	Power supply	AC220V; 50Hz (may customized)
02	Power	1.5 Kw-4.5Kw
03	Air source	0.55Mpa-0.6Mpa clean and stable compressed air
04	Round bottle	Height: 100-320mm; diameter:Ф100-Ф180mm
05	Flat bottle	Length:100-200mm; Width:40-80mm; Hieght:100- 320mm
06	Bottle neck (minimum)	Φ40mm (may customized)
07	Filling product	High viscous, low viscous and non-viscous products
08	Filling range	1L-5L
09	Filling error	≦±4g
10	Number of filling nozzles	6/8/10/12 filling heads
11	Production capacity	1200/1800/2400/3000 bottles/hour
12	Machine weight	about 1500Kg
13	Machine dimension (L×W×H)	2400mm×1500mm×2200mm

Machine details:

Filling nozzle:

The filling nozzle is extended, can diving into the bottle bottom to filling, filling meanwhile going up, to prevent bubbles.



The position of adjustment are all carved scale or equipped with digital display, easy to adjust; and specification adjustment can be achieved without tool;





Part of filling hopper:

- (1) The connector is all adopt fast loading clamp type, easily dismantle, clean and maintain.
- (2) All pipe joints are installed a drip tight gasket, for avoiding liquid drip, ensured a long-term service life and won't penetrate.

 (3) Designing and production meet GMP. Easily dismantle, clean and maintain.



Piston fall off piston cylinder

For the difficulty of cleaning piston cylinder and changing sealing ring, our company designed a new filling machine which adopt fully automatic cleaning system, before clean or replace material, through man-machine interface operation, the piston can automatically fall off and return the piston cylinder, then the rest material will flow into recycling platform by gravity, save the time of manual cleaning




Conveyor and drip gutter: the conveyors before filling and after filling equipped with drip gutter also, to prevent liquid drop on ground and pollution workshop.



Application products:This filling machine is good work for vaious of cooking oil



Protection door: All doors on the machine are equipped with safety door switches and full range of interlock control. If any door is opened, the machine cannot start or stop automatically.

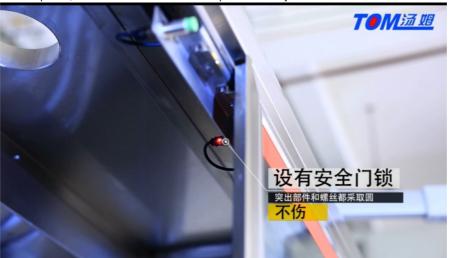

Touch screen: The support of touch screen adopts 360-degree rotatable bracket, which is easy to operate, simple and generous in appearance, strong in practicability, and gives the operator a kind of enjoyment at one's own will.



Cable trays: simple structure, beautiful appearance, flexible configuration and convenient maintenance, so that the cables and air pipes on the site are not messy.



Packaging & Shipping
The machine is packked by non-fumigation wooden case, and for keeping the wooden case more secure, we inserted the iron support inside wooden case, makes it suitable for long-term sea delivery.



Tom's logistic department will load the goods into container directly in Tom factory



Jiangsu TOM Intelligent Equipment Co., Ltd.,

+86 13306111001

tech@cn-tom.com tom-packs.com



No.99, Rulin Town, Jintan District, Changzhou City, Jiangsu Province, China.